


ASPIRATORE ASSIALE – AXIAL FAN



MODELLO MODEL	A	B	C	D	ØE
SONAR 10/4"	160	160	63	41	100
SONAR 12/5"	180	180	63	41	120

CE IPX5 T45

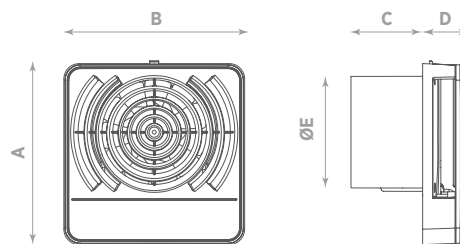

Aspiratori elicoidali per espulsione aria direttamente all'esterno o in brevi condotti;

- Griglia con montaggio "a scatto";
- Fissaggio a 4 viti per la massima tenuta;
- Per condotti Ø100-120 mm;
- Motore su cuscinetti a sfera per una lunga durata;
- Alte prestazioni, silenzioso e a basso consumo;
- Grado di protezione: IPX5 (Norma EN 60529);
- Temperatura ambiente di esercizio 45°C;
- Serranda posteriore "anti-ritorno" ;
- Conformi alla Norma EN 60335-2-80;
- Versioni: Base, Timer, HT;
- **POSIZIONAMENTO:** A parete, a soffitto.



Axial fans to extract air directly outside or through short ducting;

- "Snap" assembly grid;
- 4-screw fastening for maximum tightness;
- For ducts Ø100-120 mm;
- Ball bearing motor for a long life;
- High performances, silent and with low power consumption;
- IPX5 protected (EN 60529);
- 45° C working temperature;
- Backdraught shutter;
- In accordance with Standard EN 60335-2-80;
- Base, Timer and HT model options;
- **POSITIONING:** Wall and ceiling mounting.

DATI TECNICI – TECHNICAL DATA

MODELLO MODEL	CODICE CODE	Ø FORO Ø HOLE (mm)	TENSIONE VOLTAGE (Volt)	FREQUENZA FREQUENCY (Hz)	PORTATA FLOW RATE (m³/h)		PRESS. MAX MAX PRESS. (mm H ₂ O)	PRESS. MAX MAX PRESS. (Pa)	POTENZA POWER (W)	RUMOROSITÀ NOISE dB(A) _{2m}	PESO WEIGHT (kg)
					SENZA SERRANDA WITHOUT SHUTTER	CON SERRANDA WITH SHUTTER					
SONAR 10/4"	0056500	100	220-240	50	95	85	5,9	58	10	28	0,65
SONAR 10/4" T	0056501	100	220-240	50	95	85	5,9	58	10	28	0,65
SONAR 10/4" HT	0056502	100	220-240	50	95	85	5,9	58	10	28	0,65
SONAR 12/5"	0056510	120	220-240	50	170	150	6,3	62	16	35	0,75
SONAR 12/5" T	0056511	120	220-240	50	170	150	6,3	62	16	35	0,75
SONAR 12/5" HT	0056512	120	220-240	50	170	150	6,3	62	16	35	0,75

GRAFICI DI PORTATA – FLOW CHARTS

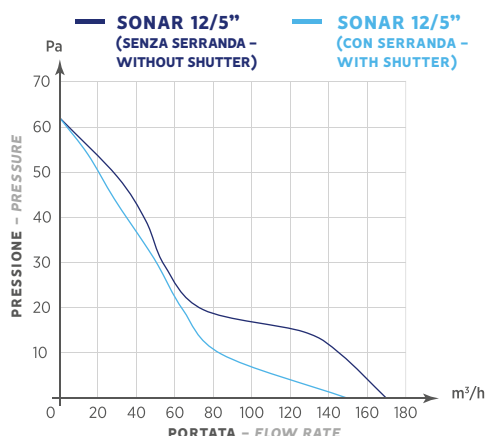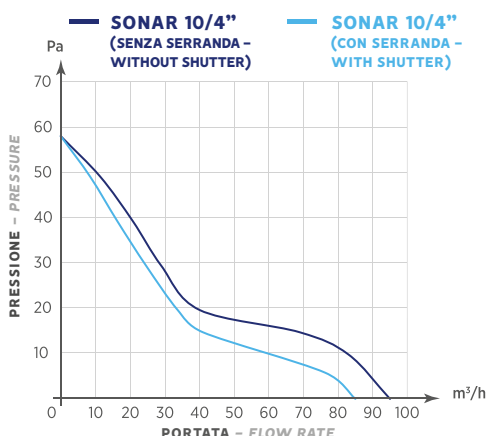

APPROFONDIMENTI

 SONAR è il nuovo aspiratore elicoidale perfetto per estrarre aria o esalazioni da tutti gli ambienti.

MASSIMA FLESSIBILITA'

SONAR è disponibile in due taglie, SONAR 10/4" e SONAR 12/5" per adattarsi a tutti i tipi di ambiente (piccoli o medio-grandi).

PROTETTO DALL'ACQUA

Grazie alla protezione contro i getti d'acqua IPX5, SONAR può essere installato in tutti gli ambienti della casa.

COMFORT ED ESTETICA MODERNA

SONAR, grazie ad un sistema convogliatore-ventola completamente rinnovato, riesce a garantire un livello di emissioni sonore minime, con un design moderno.

VERSIONI DISPONIBILI

BASE

Versione base che funziona in modo automatico.

T (TIMER ELETTRONICO)

Il prodotto è dotato di un ritardo allo spegnimento selezionabile tra 3, 7, 15 e 25 minuti tramite comodi DIP SWITCHES.

HT (UMIDOSTATO E TIMER ELETTRONICO)

Il prodotto è dotato di un sensore di umidità che permette al prodotto di attivarsi in autonomia al superamento di una delle 4 soglie impostabili (40%, 60%, 75% e 90%) e di un ritardo allo spegnimento selezionabile tra 3, 7, 15 e 25 minuti tramite comodi DIP SWITCHES.

FURTHER INFORMATION

 SONAR is the new axial fan which is perfect for extracting air or exhalations from all environments.

MAXIMUM FLEXIBILITY

SONAR is available in two different sizes, SONAR 10/4" and SONAR 12/5" in order to adapt to all types of environments (small or medium-big).

PROTECTED AGAINST WATER

Thanks to its IPX5 protection against water jets, SONAR can be installed in any environment of the house.

COMFORT AND MODERN AESTHETICS

Thanks to a completely redesigned conveyor-fan system, SONAR is able to guarantee minimal noise emissions with a modern design.

AVAILABLE VERSIONS

BASE

Base version that works in automatic mode.

T (ELECTRONIC TIMER)

The product has a switch-off delay which can be selected among 3, 7, 15 and 25 minutes via simple DIP SWITCHES.

HT (HUMIDISTAT AND ELECTRONIC TIMER)

The product has a humidity sensor which allows the machine to automatically activate itself when one of the 4 settable thresholds is exceeded (40%, 60%, 75% and 90%) and a switch-off delay that can be selected among 3, 7, 15 and 25 minutes via simple DIP SWITCHES.